



MLC619-High Precision Aluminum Alloy Electronic ScaleLoad Cell

Model: MLC619

Category: Single PointLoad Cell

Capacity: 20kg、30kg、50kg、60kg、100kg、150kg、200kg、250kg、300kg

Dimensions: 125*40*24mm

Material: Aluminum Alloy

Application: Bench Scale、Pricing Scale、Electronic Scale、Kitchen Scale、Postal Scale




Technical Specifications

Comprehensive Error:	0.02%FS	Output Resistance:	350±3Ω
Rated Output:	2±0.01mv/v	Insulation Resistance:	≥5000MΩ(100VDC)
Non-linearity:	0.02%FS	Excitation Voltage:	9~12VDC
Hysteresis:	0.02%FS	Compensated Temp Range:	10~+40°C
Repeatability:	0.02%FS	Operating Temperature:	20~+60°C
Creep:	0.02%FS/10MIN	温°Effect on Zero:	0.02%FS/10°C
Zero Balance:	±1%FS	温°对 Sensitivity Effect:	0.02%FS/10°C
Input Resistance:	405±10Ω	Protection Class:	IP65

Force Structure

PARALLEL BEAM LOAD CELL FORCE
INSTALLATION

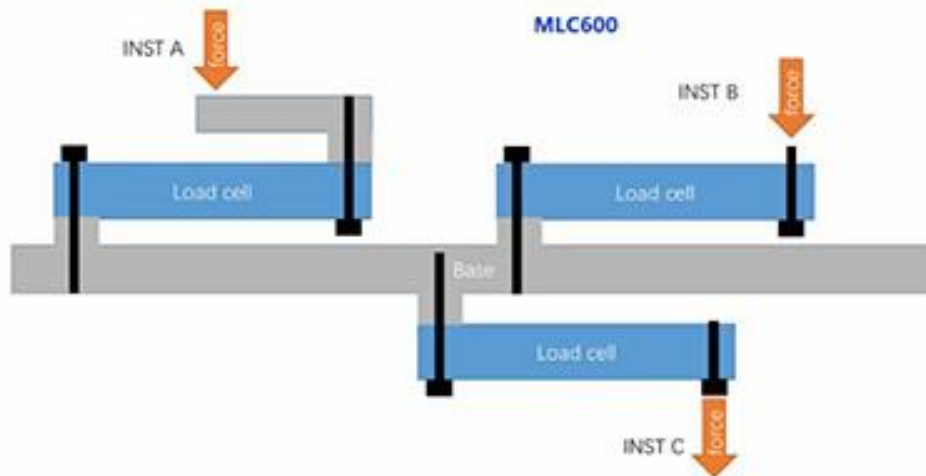

Product Dimensions

