



MLC618-High Precision Parallel BeamLoad Cell

Model: MLC618

Product Category: Parallel BeamLoad Cell

Range: 5kg, 8kg, 10kg, 15kg, 20kg, 30kg, 35kg, 50kg, 100kg

Dimensions: 80*21*22mm

Material: Aluminum Alloy

Application: Batching Scale、Hopper Scale、Packaging Scale、Platform Scale、Pricing Scale、Electronic Scale、Livestock Scale、 Checkweigher、 Tank Scale




Technical Parameters


Comprehensive Error:	0.015%FS	Output Resistance:	1000±10Ω
Rated Output:	1.5±0.01mv/v	Insulation Resistance:	≥5000MΩ (100VDC)
Non-linearity:	0.015%FS	Excitation Voltage:	9~12VDC
Hysteresis:	0.015%FS	Compensated Temp Range:	-10~+40 C
Repeatability:	0.015%FS	Operating Temperature:	-20~+60 C
Creep:	0.015%FS/10MIN	温°Effect on Zero Effect:	0.02%FS/10°C
Zero Balance:	±0.1mv	温°对 Sensitivity Effect:	0.015%FS/10°C
Input Resistance:	1090±10Ω	Protection Class:	IP67

Force Structure

PARALLEL BEAM LOAD CELL FORCE
INSTALLATION

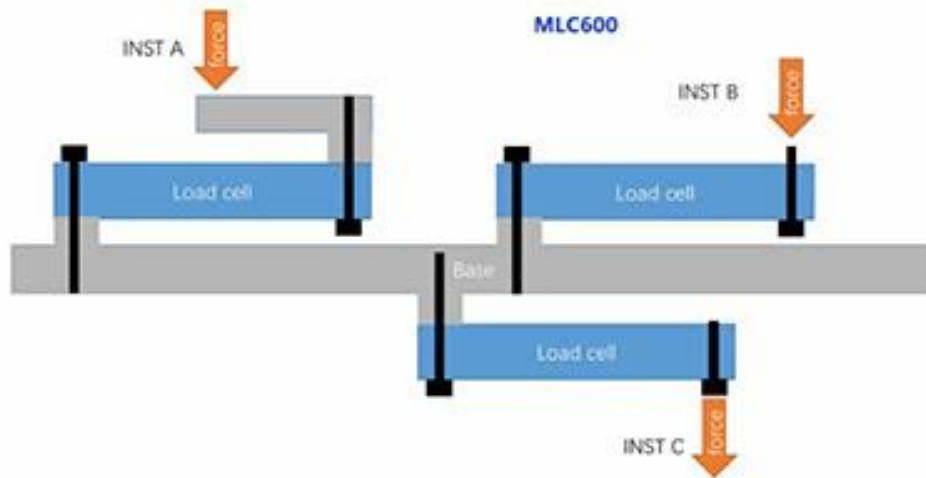

Product Dimensions

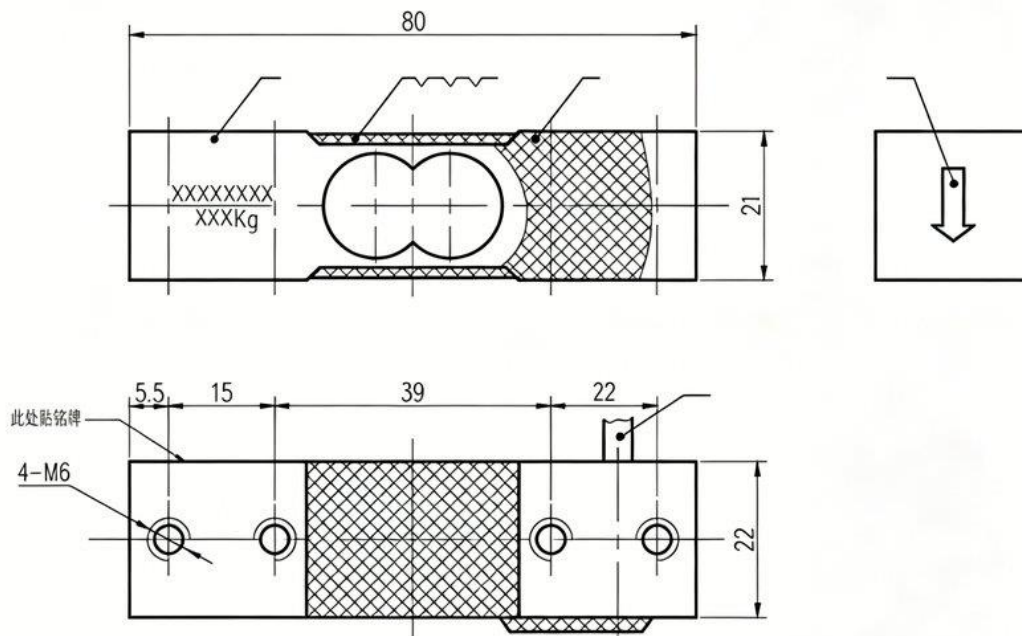



轻型小号

