



MLC623-High Precision Parallel Beam Load Cell

Model: MLC623

Product Category: Parallel Beam Load Cell

Range: 5kg, 10kg, 20kg, 50kg, 60kg, 75kg, 100kg, 120kg, 150kg, 200kg

Dimensions: 150*40*30mm

Material: Aluminum Alloy

Application Range: Batching Scale, Hopper Scale, Packaging Scale, Platform Scale, Pricing Scale, Electronic Scale, Livestock Scale, Checkweigher, Tank Scale




Technical Parameters

Comprehensive Error:	0.017%FS	Output Resistance:	350±3Ω
Rated Output:	1±0.01mv/v	Insulation Resistance:	≥5000MΩ (100VDC)
Non-linearity:	0.017%FS	Excitation Voltage:	9~12VDC
Hysteresis:	0.017%FS	Compensated Temp Range:	-10~+40 C
Repeatability:	0.01%FS	Operating Temperature:	-20~+60 C
Creep:	0.017%FS/10MIN	温°Effect on Zero Effect:	0.017%FS/10°C
Zero Balance:	±1%FS	温°对 Sensitivity Effect:	0.014%FS/10°C
Input Resistance:	405±10Ω	Protection Class:	IP65Protection Class

Force Structure

PARALLEL BEAM LOAD CELL FORCE
INSTALLATION

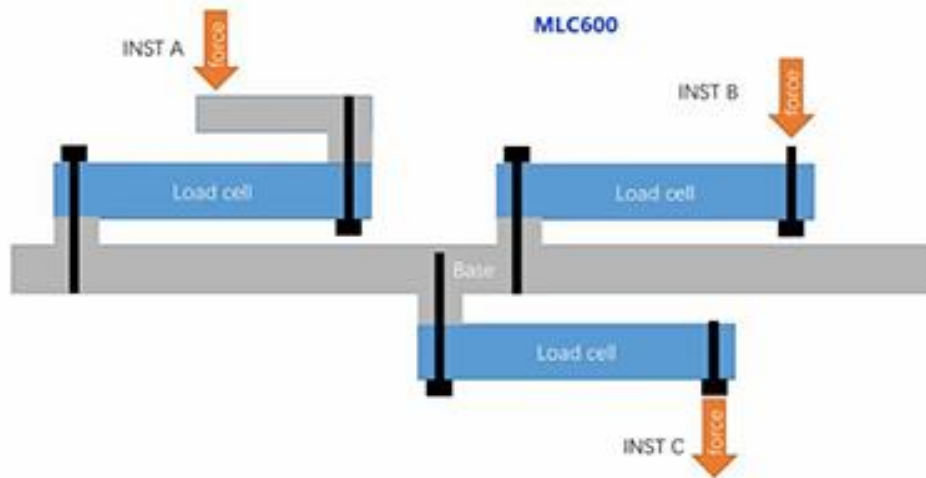

Product Dimensions

