



## MLC801-SBA 平台秤 包装秤 高精度合金钢悬臂梁称重传感器 20t

型号: MLC801-SBA

类别: 剪切梁称重传感器

范围: 0.5t、1t、2t、3t、5t、10t、20t


尺寸: 203\*43\* 37 mm; 235\*52\*48mm; 279\*67\*60mm; 318\*82\*70mm

材质: 合金钢、不锈钢

适用范围: 平台秤、喂料秤、皮带秤、叉车秤、包装秤、配料秤、工业称重



Dimensions(in mm;1mm=0.03937 inches) 尺寸

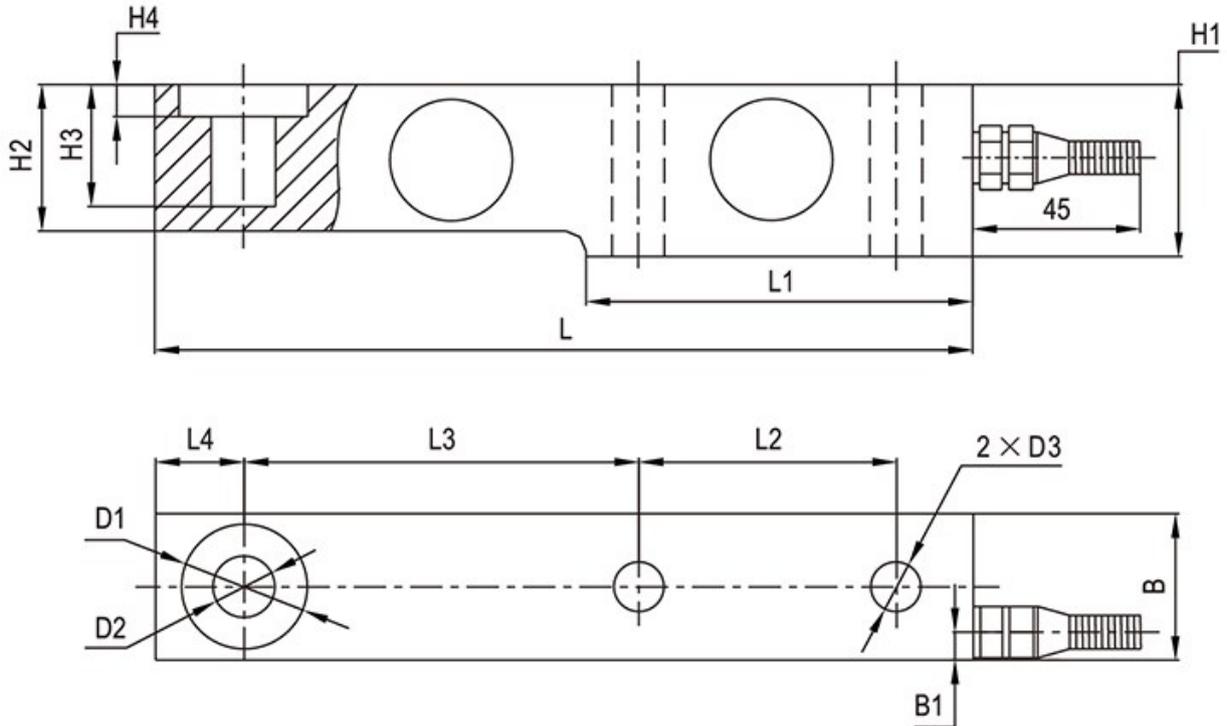


Emax[t]	L	L1	L2	L3	L4	H1	H2/B	B1	H3	H4	D1	D2	D3
0.5,1,2,3	203	95	64	98	22	43	36.6	7	30.5	8	∅32	∅16	∅13
5,7.5,8	235	110	66	124	22	52	48	7	30	12	∅38	∅22	∅21
10,15	279	133	82	140	32	67	60	8.5	20	8.5	∅48	∅32	∅28
20,25	318	153	89	159	38	82.5	70	9.5	24	9.5	∅54	∅38	∅34

技术参数

综合误差:	0.03%FS	输出电阻:	350±3Ω
额定输出:	2±0.003mV/V	绝缘电阻:	≥5000MΩ (100VDC)
非线性:	0.03%FS	激励电压:	9~12VDC
滞后:	0.03%FS	补偿温度:	-10~+40 C
重复性:	0.02%FS	使用温度:	-20~+55 C
蠕变:	0.03%FS/10 分钟	零点温度影响:	0.03%FS/10°C
零点平衡:	±1%FS	温度灵敏度影响	0.02%FS/10°C
输入电阻:	350±5Ω	防护等级:	IP66 防护等级


静载称重模块

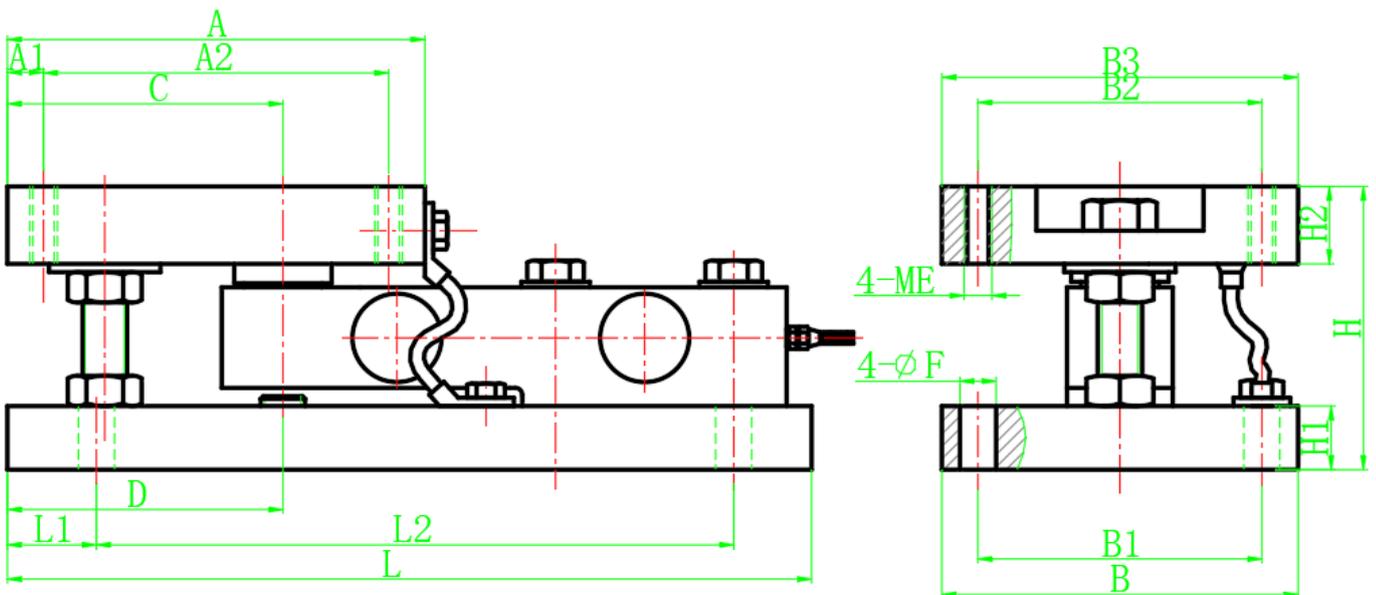

量程 (t)	A	A1	A2	C	D	L	L1	L2	B	B1	B2	B3	H	H1	H2	E	F
0.5, 1, 2, 3	150		124	99	96	286		226	112	80	102	128	102	23	28	10	13
5	178	16	146	102	99	318	32	257	152	102	120	152	129.5	29.5	38	16	17
10	184		152	108	105	360		295	154	106	122	154	168	45	45	20	21
15, 20	220	25	170	115	115	400	25	350	220	170	170	220	213	55	55	24	26
30	220	32	156	116	116	450	32	386	220	156	156	220	260	60	60	27	28

量程 (t)	A	A1	A2	C	D	L	L1	L2	B	B1	B2	B3	H	H	H2	E	F
0.5, 1, 2, 3	150	16	124	99	96	286	32	226	112	80	102	128	102	23	28	10	13
5	178	16	146	102	99	318	32	257	152	102	120	152	129.5	29.5	38	16	17
10	184	16	152	108	0	360	32	295	154	106	122	154	168	45	45	20	21
15, 20	220	25	170	115	115	400	25	350	220	170	170	220	213	55	55	24	26
30	220	32	156	116	116	450	32	386	220	156	156	220	260	60	60	27	28

动载称重模块

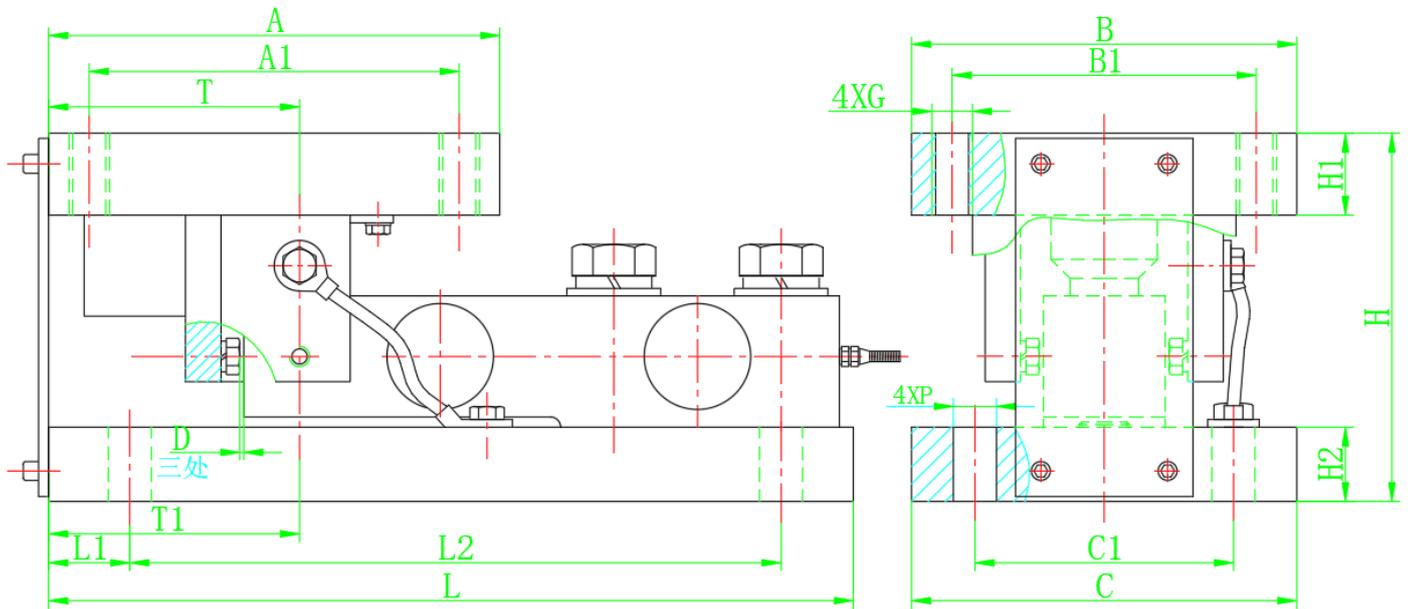

量程 (t)	A	A1	A2	C	D	L	L1	L2	B	B1	B2	B3	H	H1	H2	E	F
0.5, 1, 2, 3	150	16	124	99	96	286	32	226	112	80	102	128	102	23	28	10	13
5	178	16	146	102	99	318	32	257	152	102	120	152	129.5	29.5	38	16	17
10	184	16	152	108	105	360	32	295	154	106	122	154	168	45	45	20	21
15, 20	220	25	170	115	115	400	25	350	220	170	170	220	213	55	55	24	26
30	220	32	156	116	116	450	32	386	220	156	156	220	260	60	60	27	28